



6545 French Blue




Art Classics 4 - Wonderland™









625 Yellow-brown

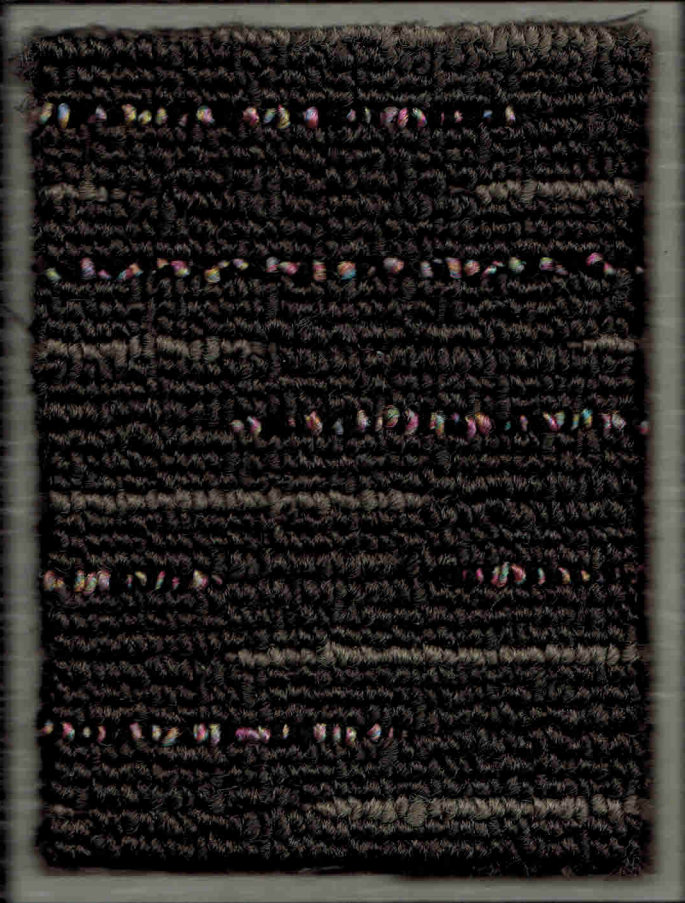



625 Dark brown

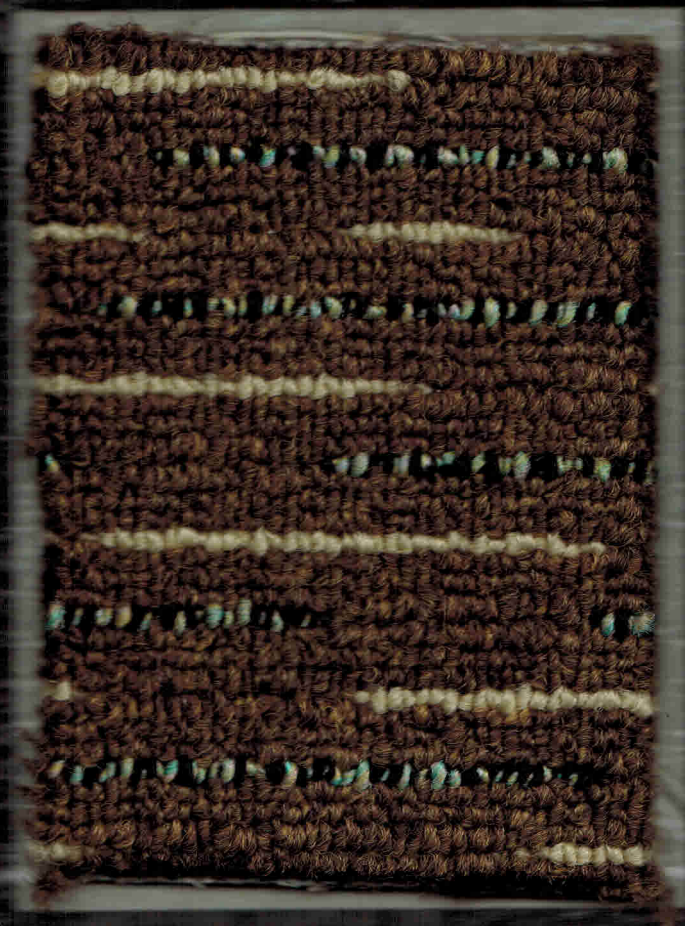

625 Yellow-brown

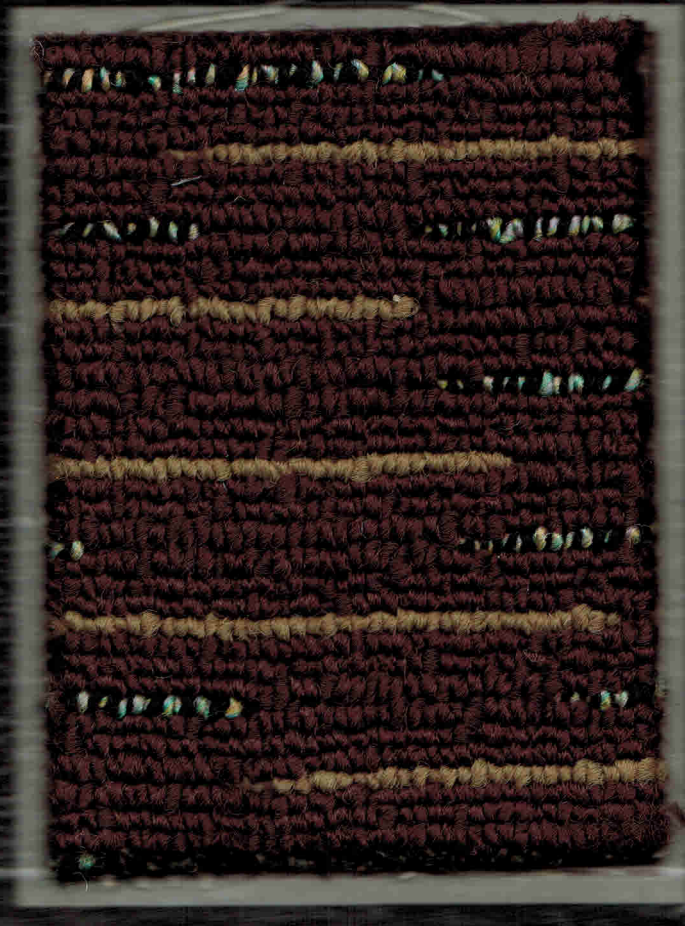

625 Dark brown

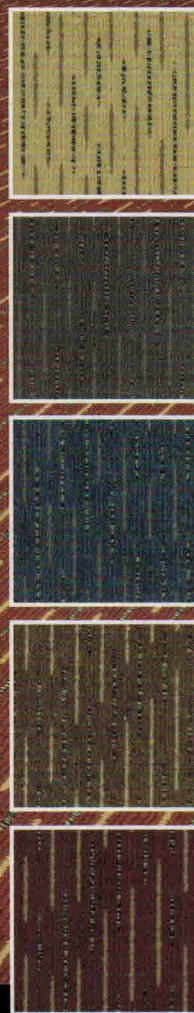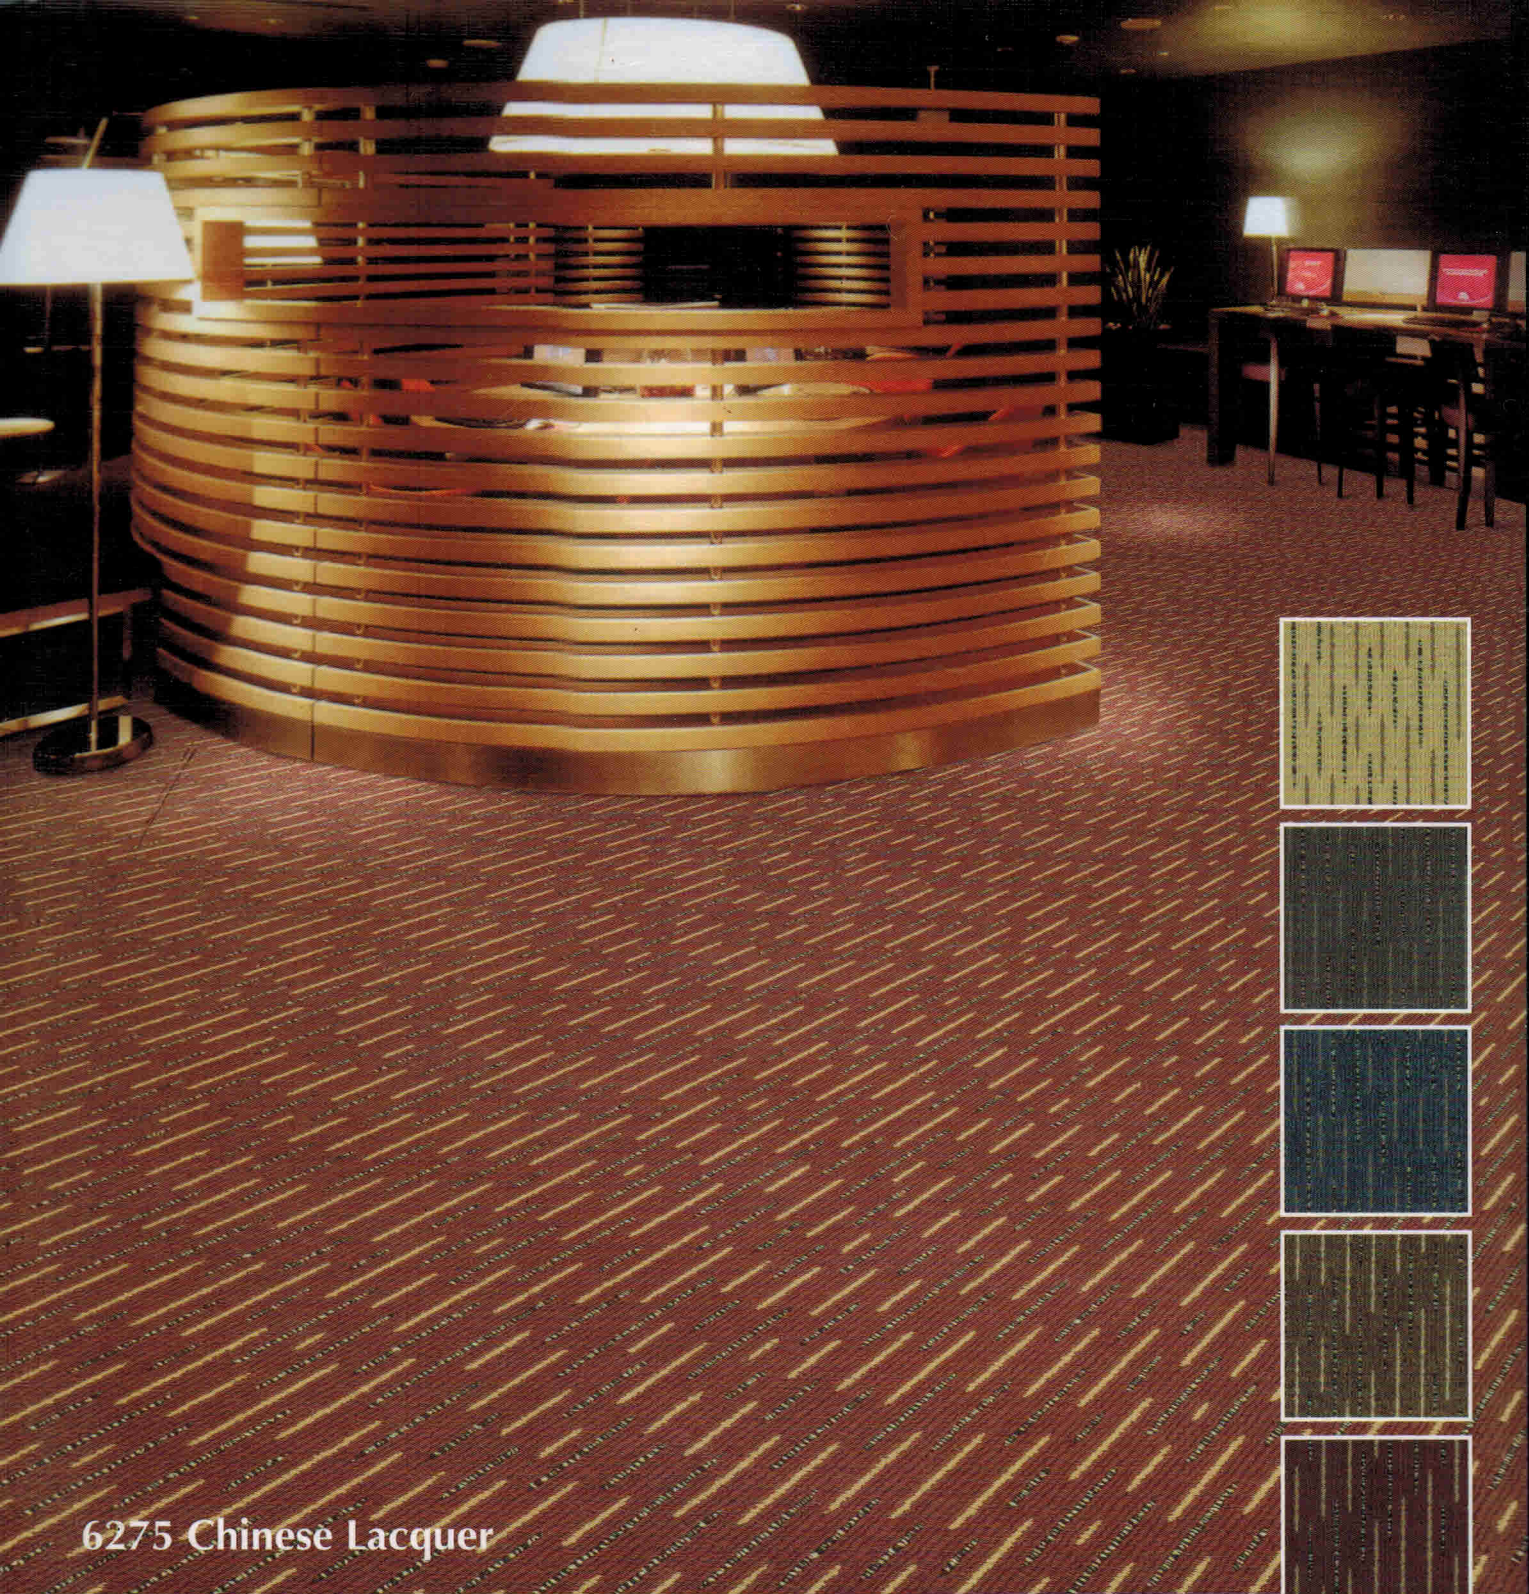

6275 Chinese Lacquer

Specifications

Construction	1/10" Tufted Plain Loop Pile Graphics
Fibre	100% BCF Solution Dyed Synthetic + Cable Space Dyed Synthetic
Pile Weight	ca. 880g/m ² (26 oz/y ²)
Total Weight	ca. 2000g/m ² (59 oz/y ²)
Pile Height	ca. 5mm
Total Height	ca. 7mm
Stitch Rate	48 per 10cm
Stitch Density	189,600
Secondary Backing	ActionBac®
Standard Roll Size	3.66 x 30m

Warranties

10-year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.
Where seaming is necessary, a seam sealant **must** be used for all such installations.
Due to dyelot variations, actual material may vary slightly from the samples.
Chair pads are recommended to prevent premature wear of carpet.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-1993)
Static Control	Built-in Permanent
Tuft Bind	4.7 lbs (ASTM-D-1335)
Dimensional Stability	Max 0.25% change (AACHEN)
Flammability	
Radiant Panel	0.28 W/cm ² (ASTM-E-648)
US Federal Flammability Std	Pass (DOC FF-1-70)
Pill Test	Self-extinguishing (ASTM-D-2859)
Smoke Density	Max 450 (ASTM-E-662)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry cleaning	5 (AATCC-16S)
to ozone	5 (AATCC-129)



Elegance & Comfort in Modern Living