




8515 Gold Coin

HERITAGETM
CARPETS

LegacyTM



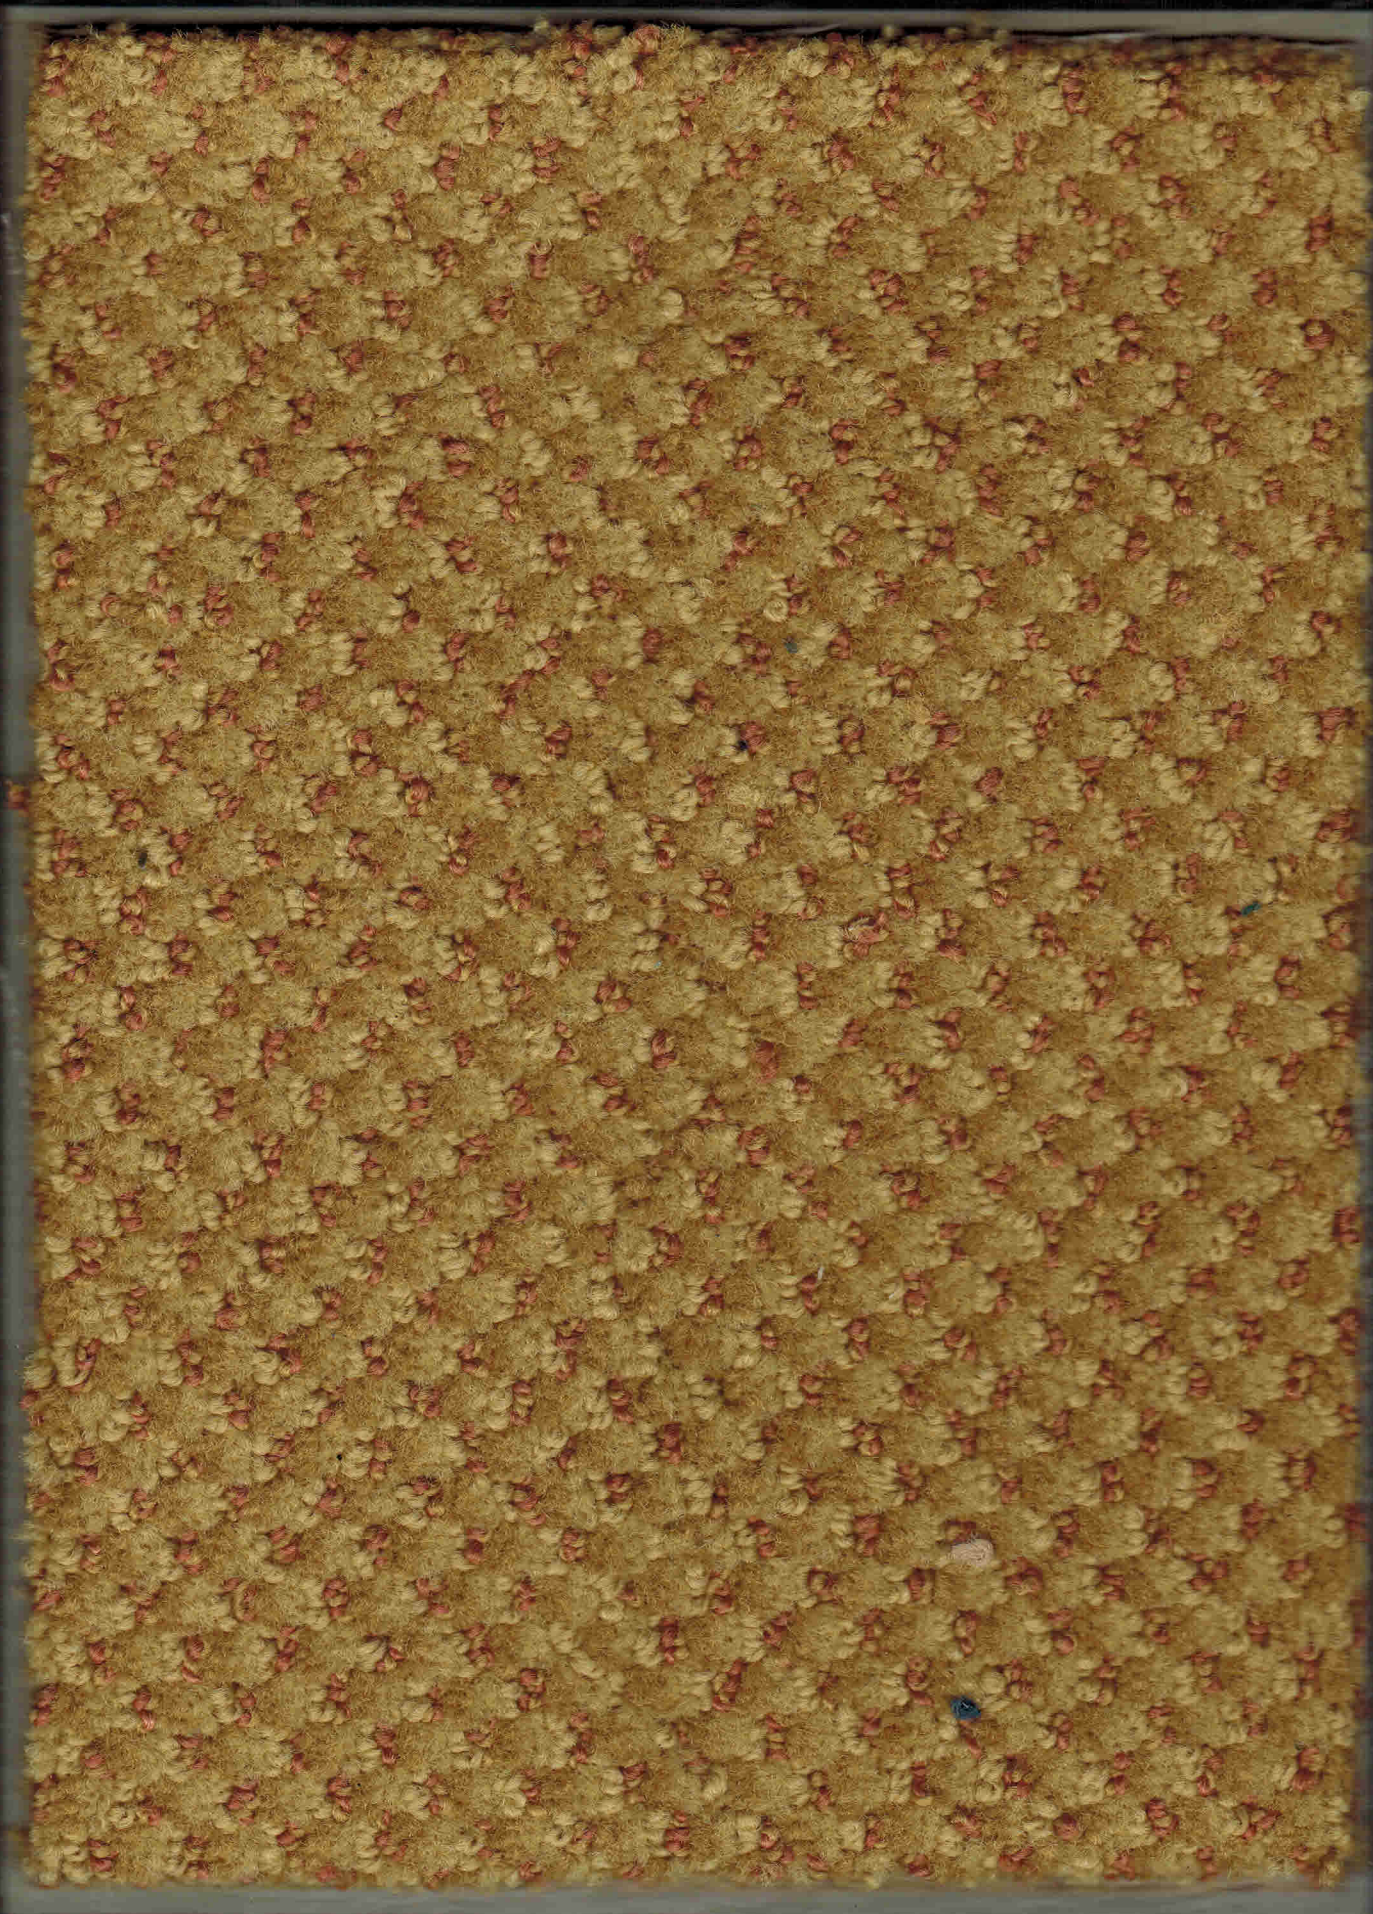



175-1



175-2



175-3




175-4



175-5




175-6

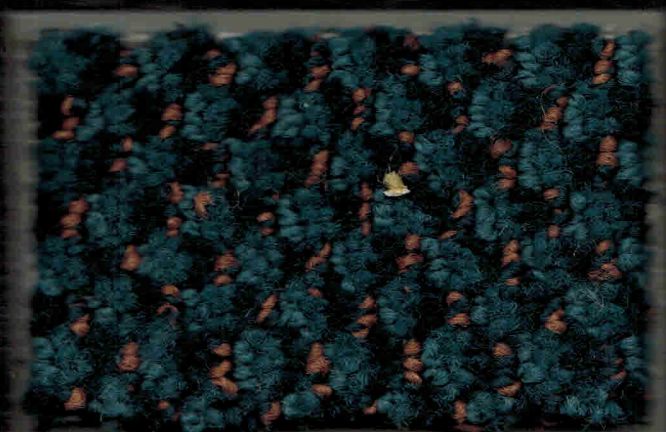

175-7



175-8

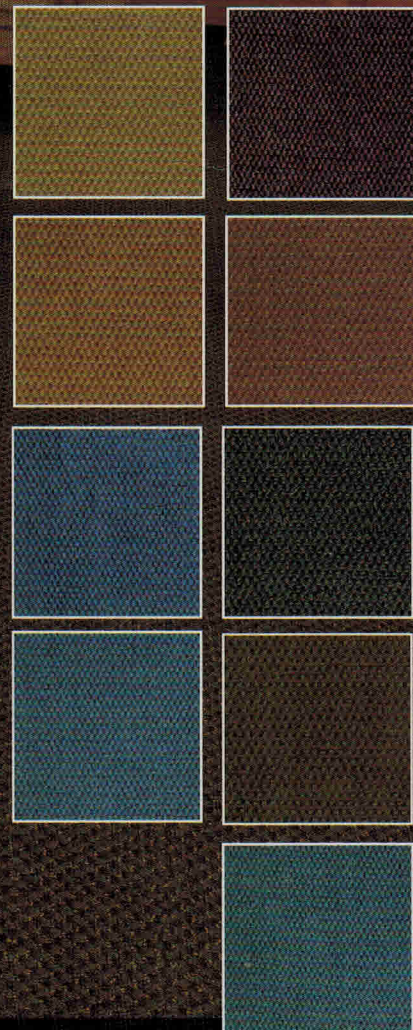

8520 Tar Sands

Specifications

Construction	1/8" Precision Cut/Uncut Tufted Graphics
Fibre	100% BCF Nylon Differential Dyed
Dye System	Pressure Beck Dyed
Pile Weight	ca. 1085g/m ² (32 oz/y ²)
Total Weight	ca. 2050g/m ² (60.5 oz/y ²)
Pile height	ca. 5mm
Stitch Rate	42.7 per 10cm
Density	5600 FHA (11.6 Kilotex/cm ²)
Secondary Backing	ActionBac®
Standard Roll Size	3.66 x 40m
Pattern Repeat	1/2 - inch x 1/2 - inch (1.5cm x 1.5cm)

Warranties

10-year Limited Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Commercial and Hospitality Use

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The tiles are recommended to be installed by Quarter-Turn method. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles.

Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.

Best results are obtained when cleaned with a dry-shampoo method.

Performance (as tested by ITTS Inc. USA and Canada)

Flammability	U.S Federal Flammability Std	Passes (CPSC FF1-70)
	Radiant Panel	Class 1 (ASTM E-648)
	Canada	CG5B 4GP-129, CAN 4-S102-2
Colourfastness	to light	L5 (Negligible or No Change) (AATCC-16E)
	to crocking-wet & dry	Grey Scale 5 (Negligible or No Stain) (AATCC-165)
Anti-microbial protection		BioFresh™ present in backing laminate
Static Generation		Maximum 3.0 kV (AATC-134)
CCI/ CRI Air Quality Test		Green Label Plus GLP 1878
ISO Quality Audit		Certificate #606

Manufacturer's Quality Certificate ISO 9002



Tone-on Tone
Pattern



Nylon 6,6



FuzzFree™



Pressure Beck Dyed



BioFresh™
Anti-microbial



CRI Green
Label +Plus

HERITAGE
CARPETS

Elegance & Comfort in Modern Living

Manufactured in Canada