



4801 Nougat Beige



Mandate 4<sup>TM</sup>







The text in this image is extremely faint and illegible, appearing as a series of dark, horizontal streaks against a light background. It is likely a scan of a document page where the text has been lost or is too faded to read.



Solution Dye • Anti-Static • ECO Back - "PVC Free" • Flame-retardant



4011 Navy Blue



4012 Dark Teal




4013 Black Canvas



4015 Mint Green



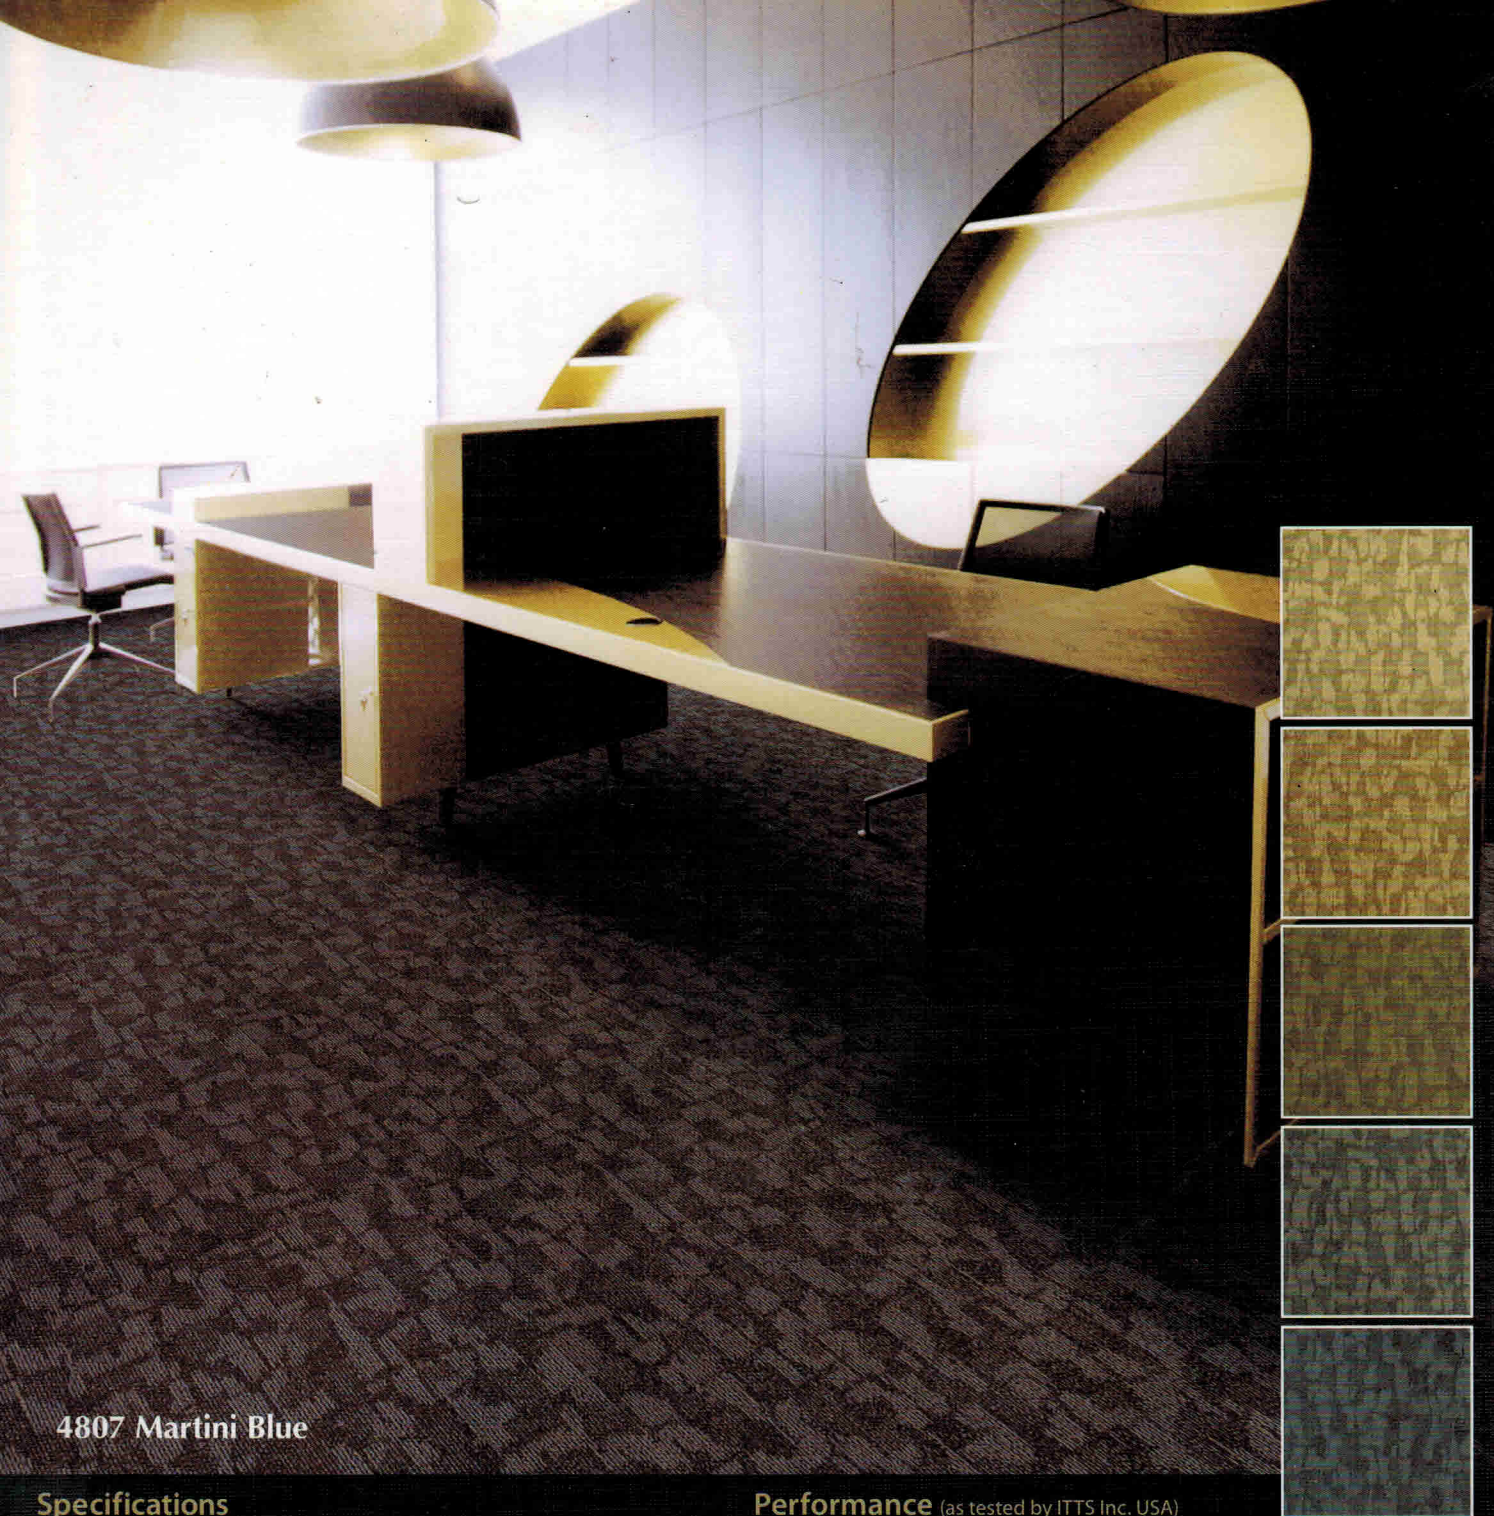

## 4807 Martini Blue

### Specifications

|               |   |
|---------------|---|
| Construction  | 1/12th Inch Multi-Level Loop Graphic              |
| Fibre         | 100% BCF Solution Dyed Synthetic                  |
| Pile Weight   | ca. 815g/m <sup>2</sup> (24 oz/y <sup>2</sup> )   |
| Total Weight  | ca. 3400g/m <sup>2</sup> (100 oz/y <sup>2</sup> ) |
| Pile Height   | ca. 4mm (+/-0.5mm)                                |
| Total Height  | ca. 6mm (+/-0.5mm)                                |
| Backing       | ECO Back - "PVC Free"                             |
| Density       | 5486  |
| Size per Tile | 50x50cm   |
| Tiles per Box | 20 pcs (5 m <sup>2</sup> )                        |

### Warranties

10-year Carpet Wear Warranty  
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

Where seaming is necessary, a seam sealant **must** be used for all such installations.

Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.

### Performance (as tested by ITTS Inc. USA)

|                       |   |
|-----------------------|---|
| Stain Resistance      | 10 (AATCC-175-2003)                           |
| Static Control        | Less < 4 KV (AATCC 134-1996)                  |
| Tuft Bind             | 7.1 lbs (ASTM-D-1335)                         |
| Dimensional Stability | < 0.1% change (AACHEN)                        |
| Flammability          |   |
| Radiant Panel         | >= 0.45 watts/cm <sup>2</sup> (ASTM-E-648-06) |
| Pill Test             | 8 (ASTM-D-2859-06)                            |
| Smoke Density         | Max 450 (ASTM-E-662-06)                       |
| Colourfastness        |   |
| to light              | 5 (AATCC-16E)                                 |
| to wet & dry crocking | 5 (AATCC-165)                                 |
| to ozone              | 5 (AATCC-129)                                 |

### Environment

The design and production of Mandate 4 Tile conforms to ISO 14001:2004 Environmental Management System and complies with environmental regulations.

As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing.

Mandate 4 Tile is an environmentally friendly "green" carpet.



Elegance & Comfort in Modern Living