



2388 Calico Blue


HERITAGETM
CARPETS

Melody 2TM






Melody 2

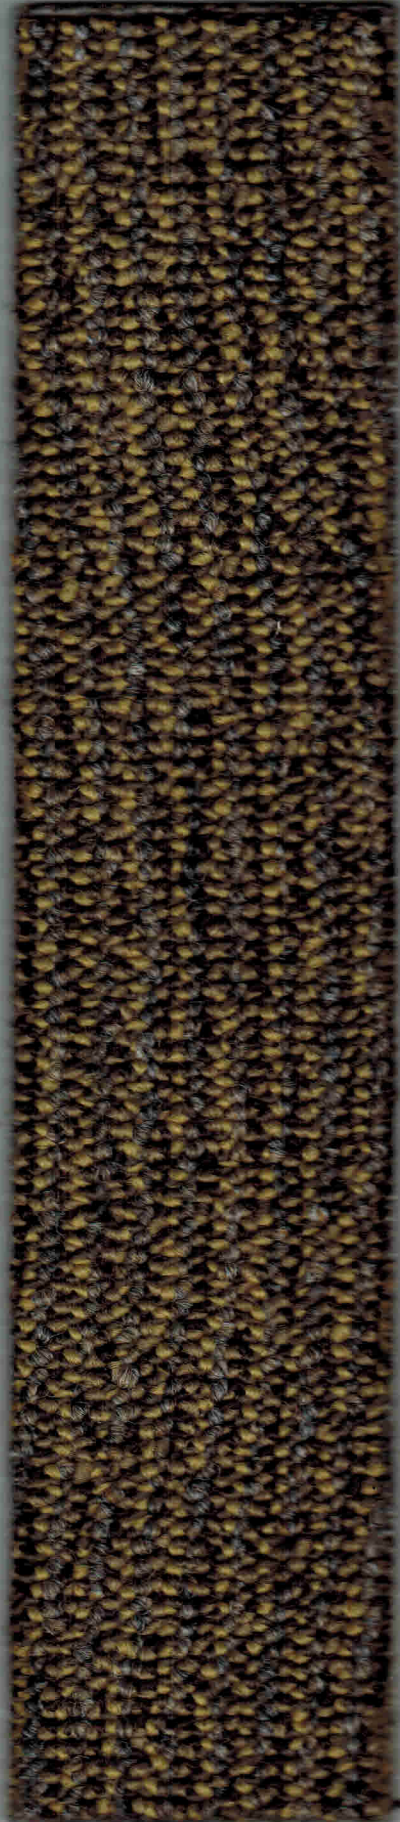


2372 Sambar


2373 Tamarind

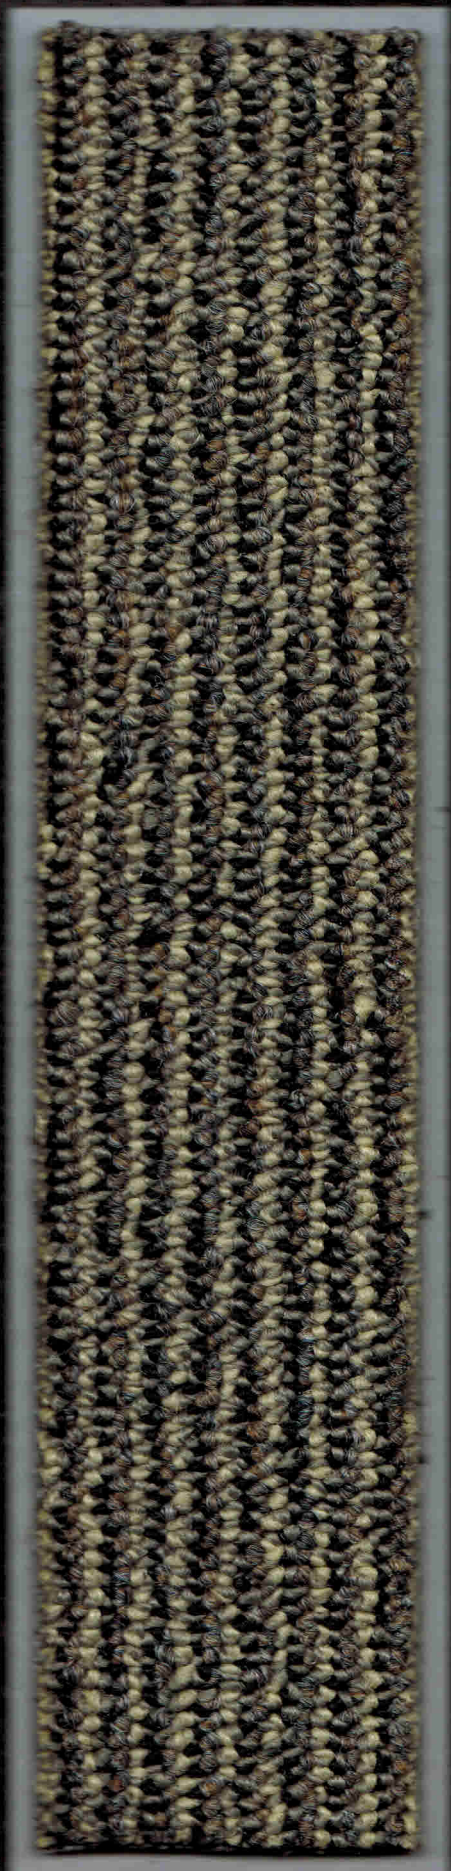

2501 Grey Dye

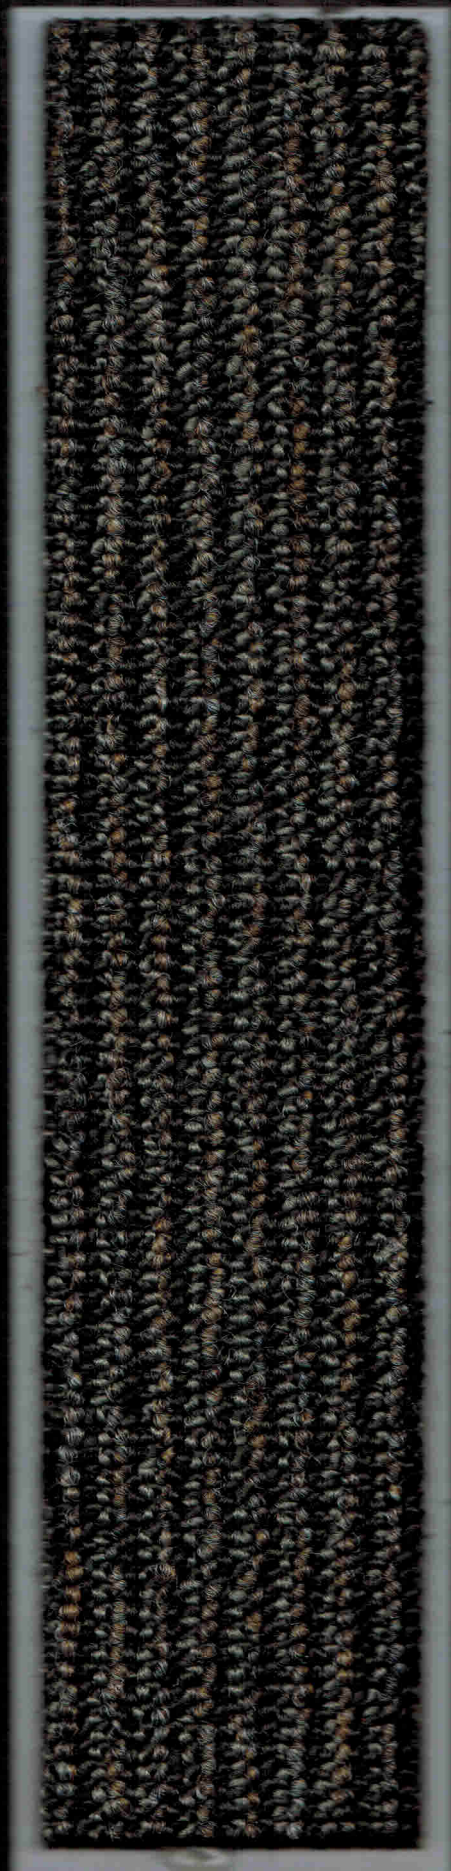

2502 Black Dye

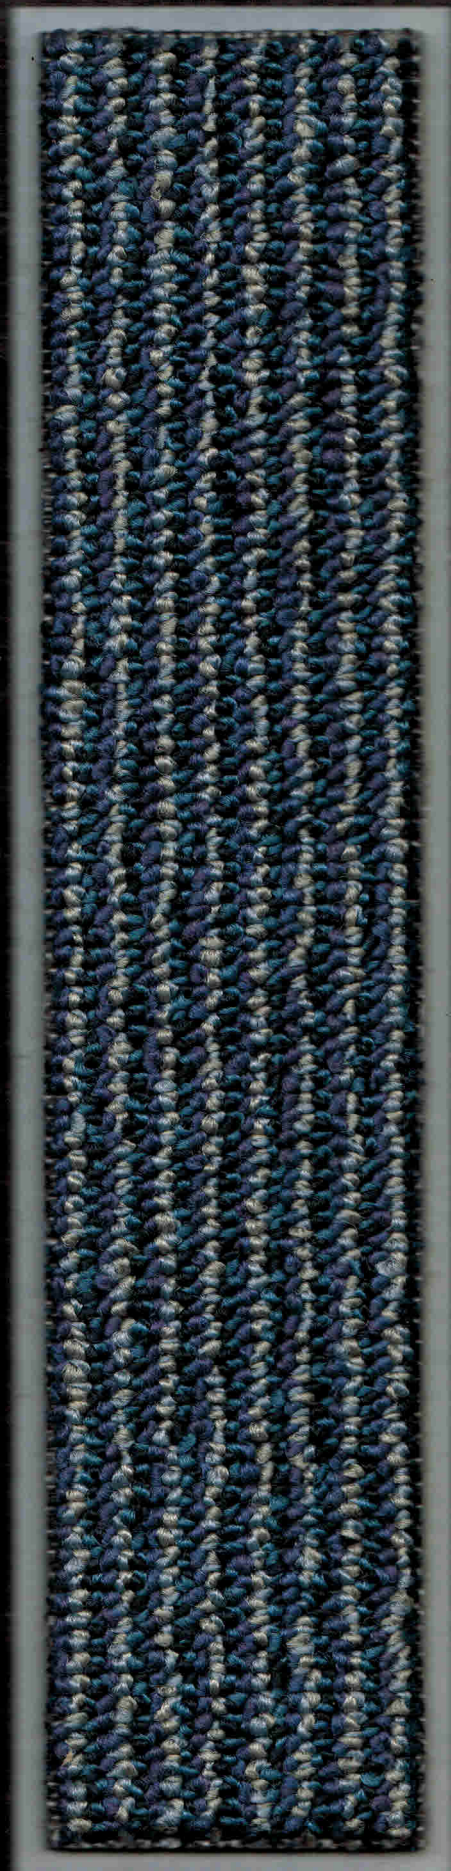

2503 Green Blue



2376 Timberlane

Specifications

Construction	5/64th Inch Level Loop Pile
Fibre	100% BCF Solution Dyed Synthetic
Pile Weight	ca. 750g/m ² (22 oz/y ²)
Total Weight	ca. 3210g/m ² (95 oz/y ²)
Pile height	ca. 3mm (+/- 0.5mm)
Stitch Rate	48 per 10cm
Backing	ECO Back - "PVC Free"
Size per Tile	50cm x 50cm
Tiles per Box	20 pcs (5m ²)

Warranties

10-year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

Where seaming is necessary, a seam sealant **must** be used for all such installations.

Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Less < 4 KV (AATCC 134-1996)
Tuft Bind	8.6 lbs (ASTM-D-1335)
Dimensional Stability	< 0.1% change (AACHEN)
Flammability	
Radiant Panel	>= 1.13 watts/cm ² (ASTM-E-648-06)
Pill Test	8 (ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E-662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry crocking	5 (AATCC-165)
to ozone	5 (AATCC-129)

Environment

The design and production of Melody 2 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

Melody 2 Tile is an environmentally friendly "green" carpet.



Elegance & Comfort in Modern Living