



8812 Blue Lapis




Miko



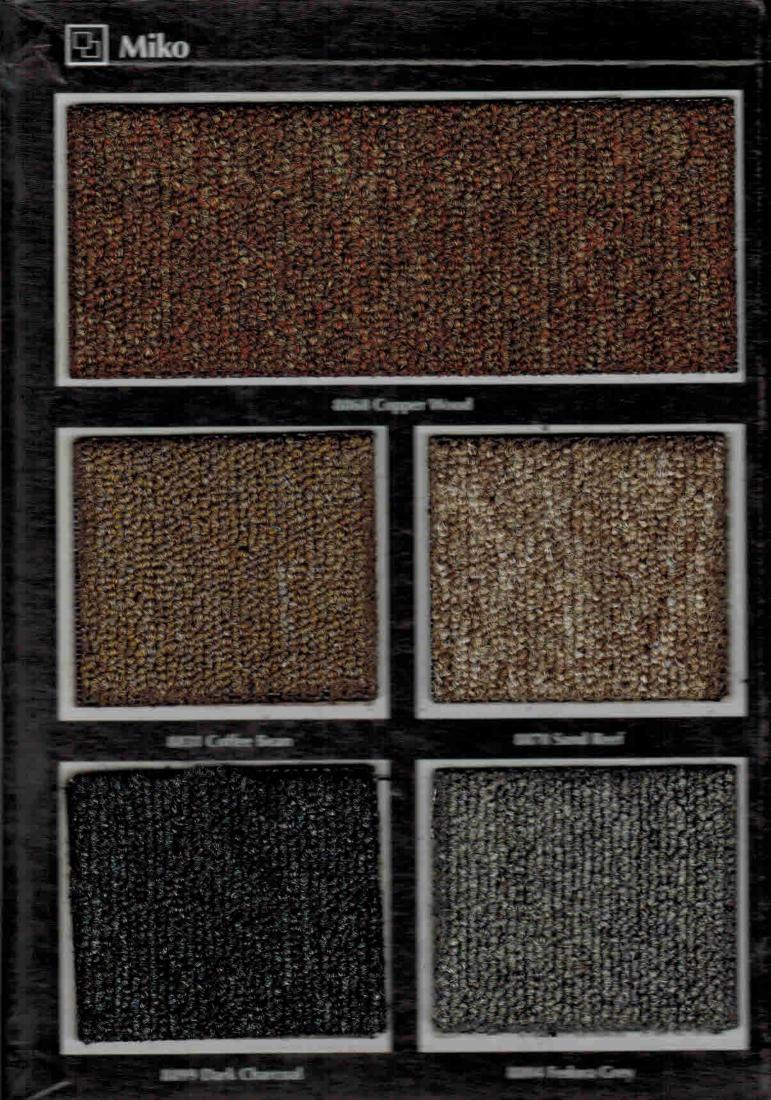

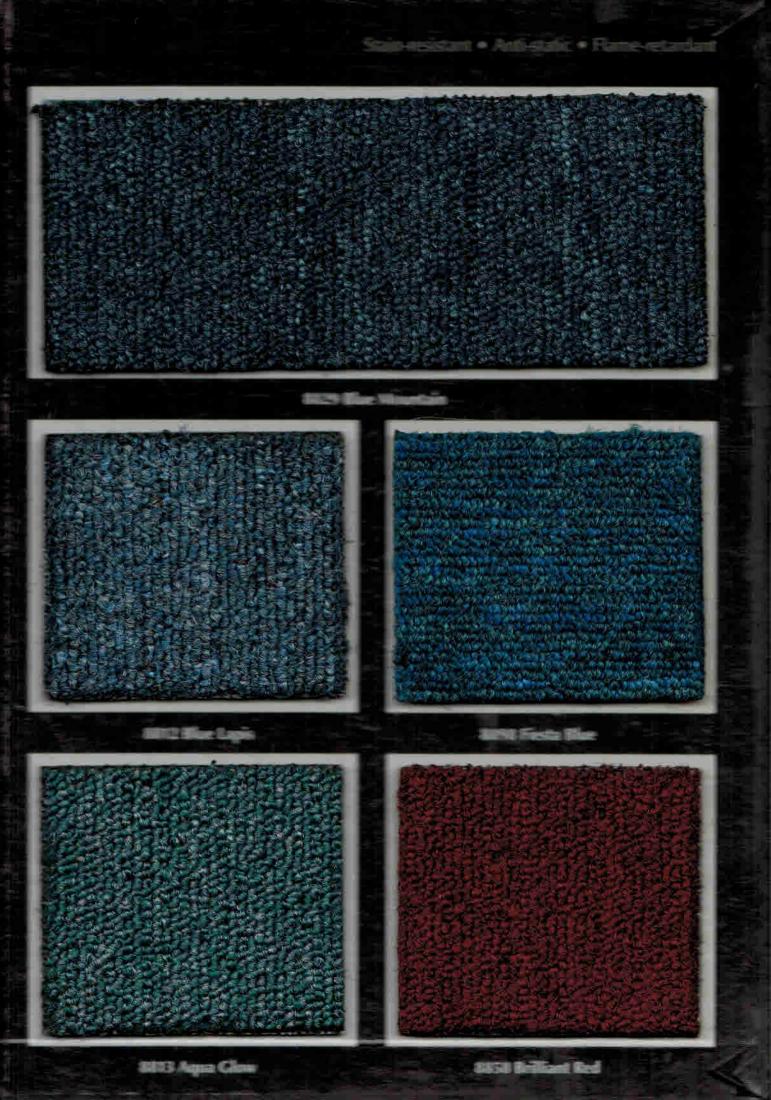

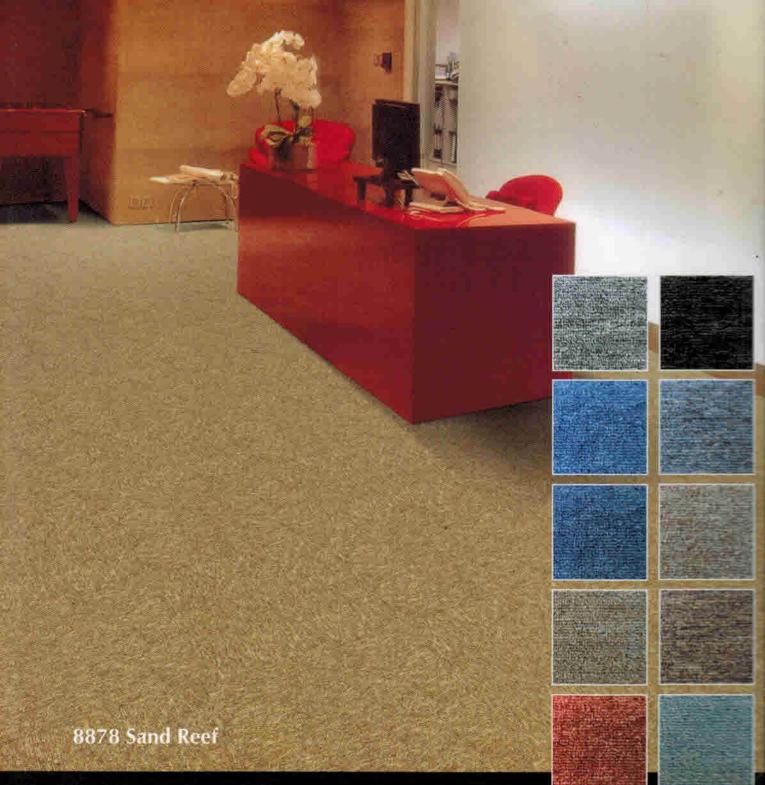

Specifications

Construction

Fibre

1/10th Gauge Loop Pile 100% BCF Solution Dyed Synthetic

3000 Denier 3-ply

Pile Weight ca. 610g/m² (18 oz/y²)

Total Weight ca. 3500g/m² (103 oz/y²)

Pile height ca. 3mm

Stitches 48/10cm (12.3/inch)

Backing ECO Back - "PVC Free"

Size per Tile 50x50cm
Tiles Per Box 24 pcs (6m²)

Warranties

5-year Carpet Wear Warranty Lifetime Antishock Carpet Warranty

Ideal for Medium Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles.

Due to dyelot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Performance

Stain Resistance Static Generation

Flammability Radiant Pan

Lightfastness

Change on wet cleaning Grey Scale 5

5.0 (AATCC 175-1993) Maximum 4.0 kv Radiant Panel ASTM E648 - Class I

Environment

The design and production of Miko Tile conforms to the ISO 14001-2004 Environmental Management System and complies with environmental regulations.

Miko Tile does not contain any PVC in its manufactured materials and packaging

Miko Tile is an environmentally friendly "green" carpet.



Elegance & Comfort in Modern Living