



3102 Enigma




Mystic™






Mystic

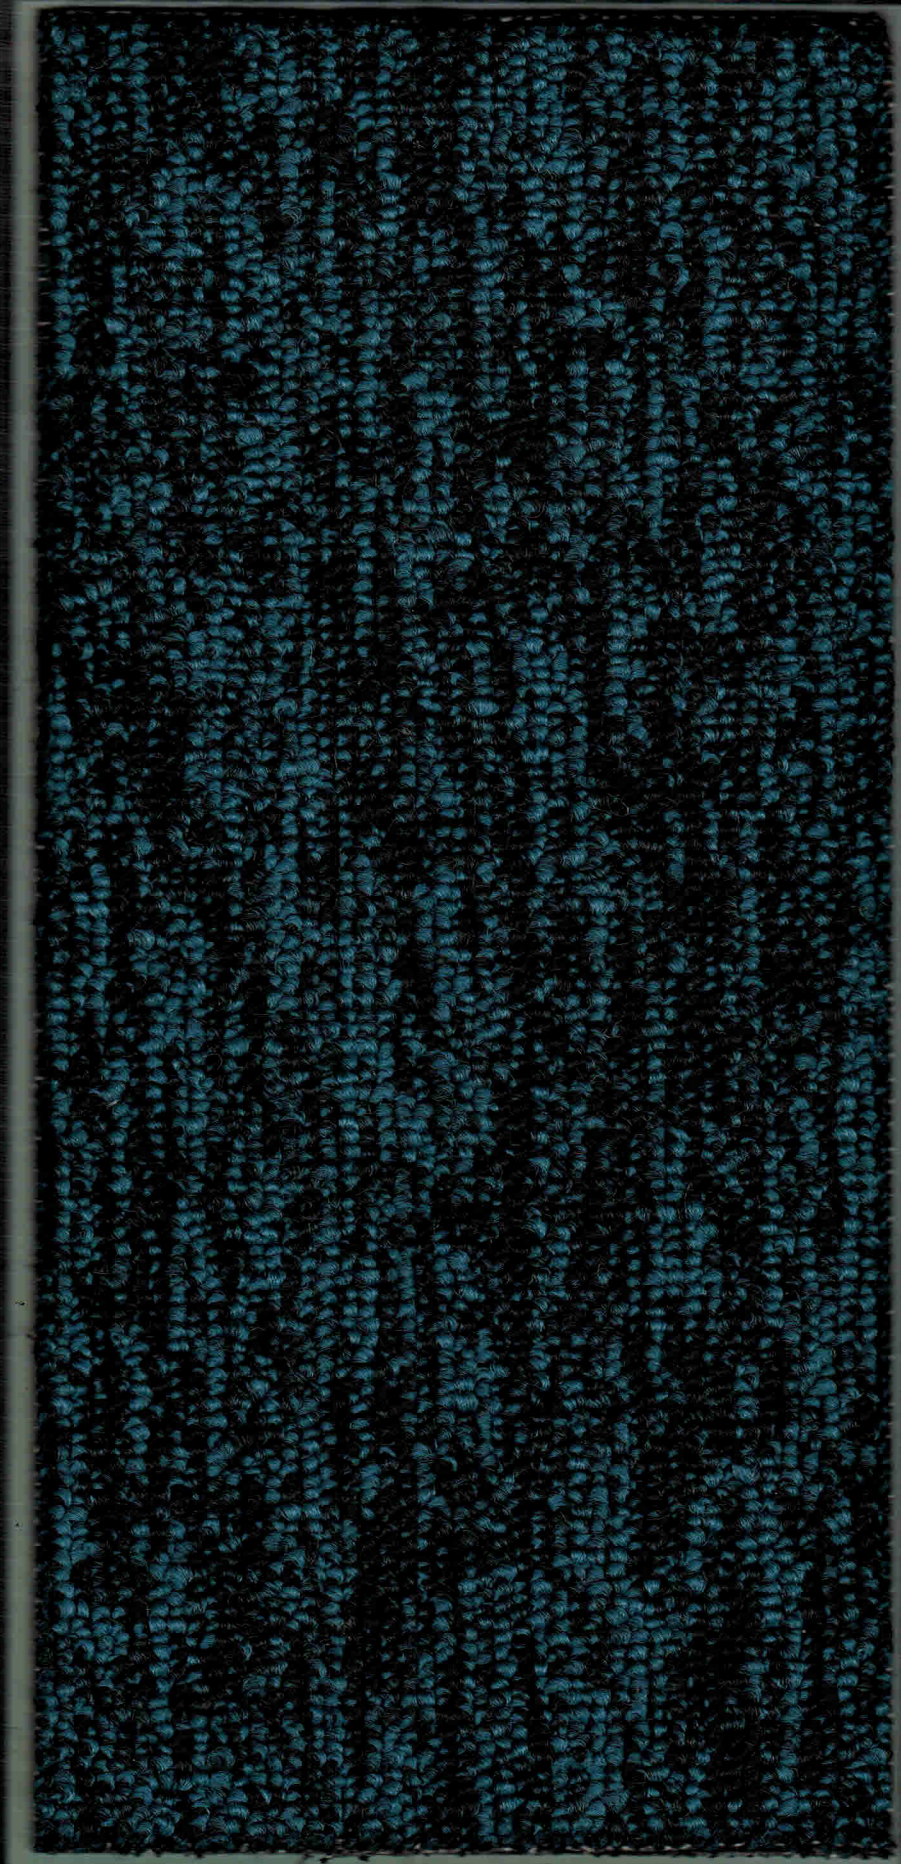

3106 Larklight

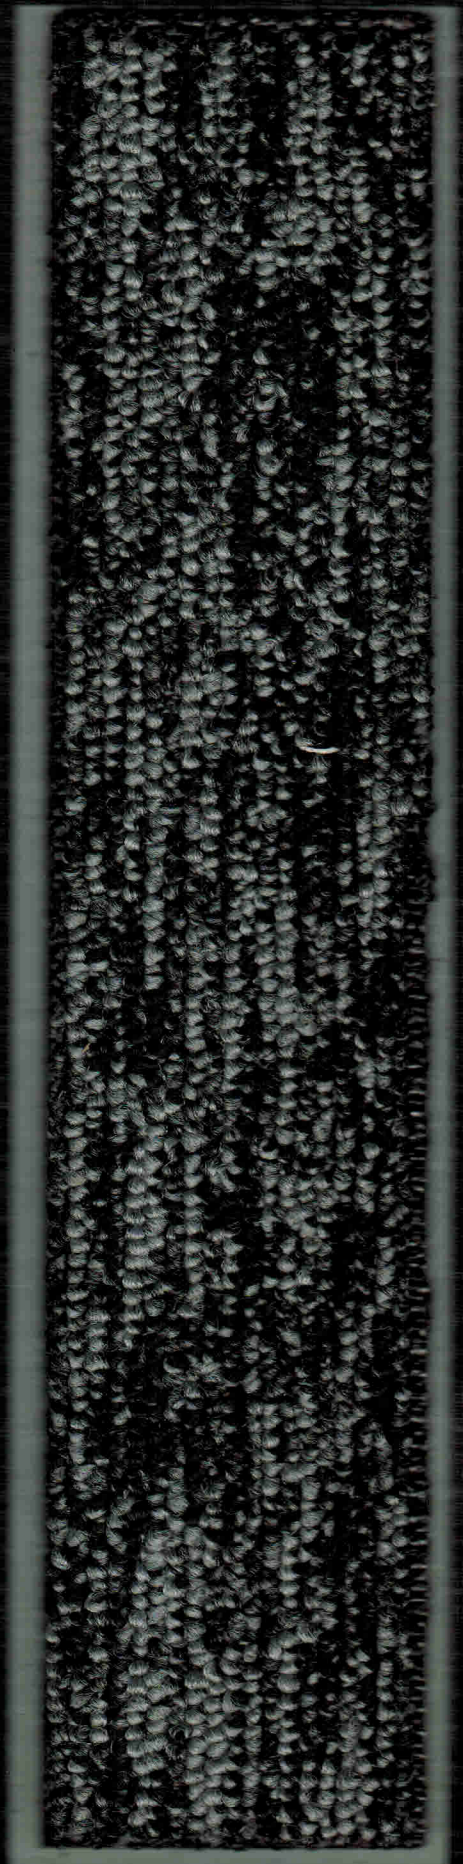


3105 Savonius

Solution Dyed • Anti-Static • ECO Back - "PVC Free" • Flame-retardant



3002 Enigma

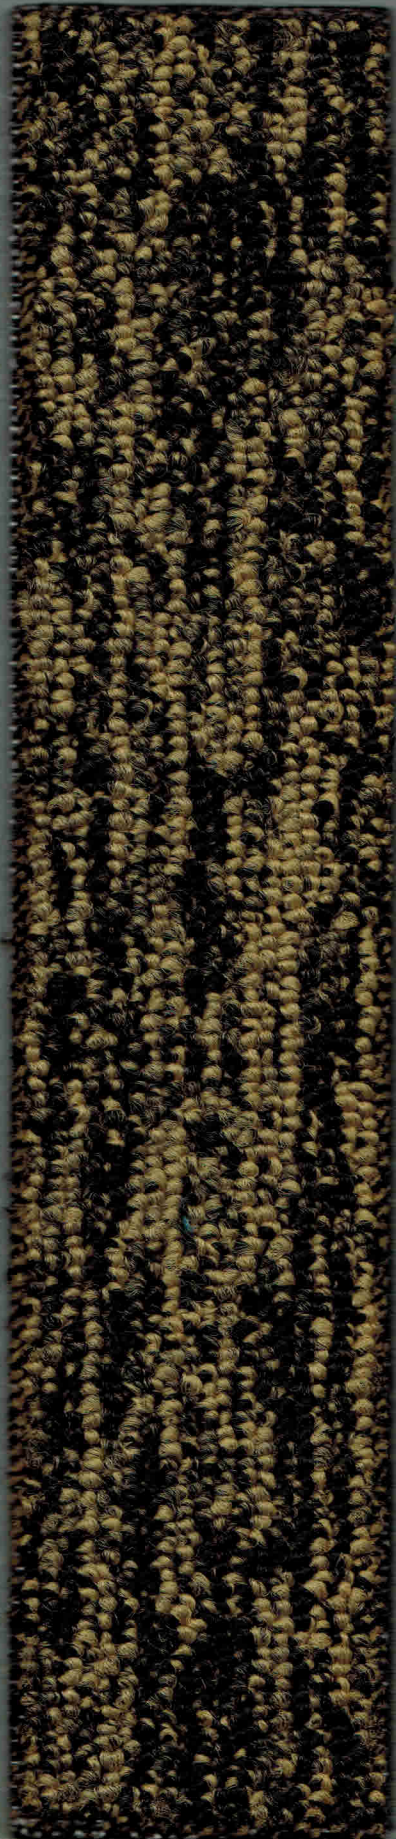

3003 Occult



3008 Paradox



3108 Paradox

Specifications

Construction	1/10th Inch Level Loop Pile
Fibre	100% BCF Solution Dyed Synthetic
Pile Weight	ca. 750g/m ² (22 oz/y ²)
Total Weight	ca. 3200g/m ² (+/- 3200g/m ²)
Pile height	ca. 3mm (+/- 0.1mm)
Stitch Rate	48 per 10cm
Backing	ECO Back - "PVC Free"
Size per Tile	50cm x 50cm
Tiles per Box	20 pcs (6m ²)

Warranties

10-year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

Where seaming is necessary, a seam sealant **must** be used for all such installations. Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Generation	Permanently antistatic
Tuft Bind	8.6 lbs (ASTM-D-1335)
Dimensional Stability	< 0.1% change (AACHEN)
Flammability	
Radiant Panel	>= 1.13 watts/cm ² (ASTM-E-648-06)
Pill Test	8 (ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E 662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry cleaning	5 (AATCC-16S)
to ozone	5 (AATCC-129)

Environment

The design and production of Mystic Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

Mystic Tile is an environmentally friendly "green" carpet.



Elegance & Comfort in Modern Living