



504 Cocoa Brown



Art Classics 5 - Horizon™









211 Dark Grey



212 Green Black

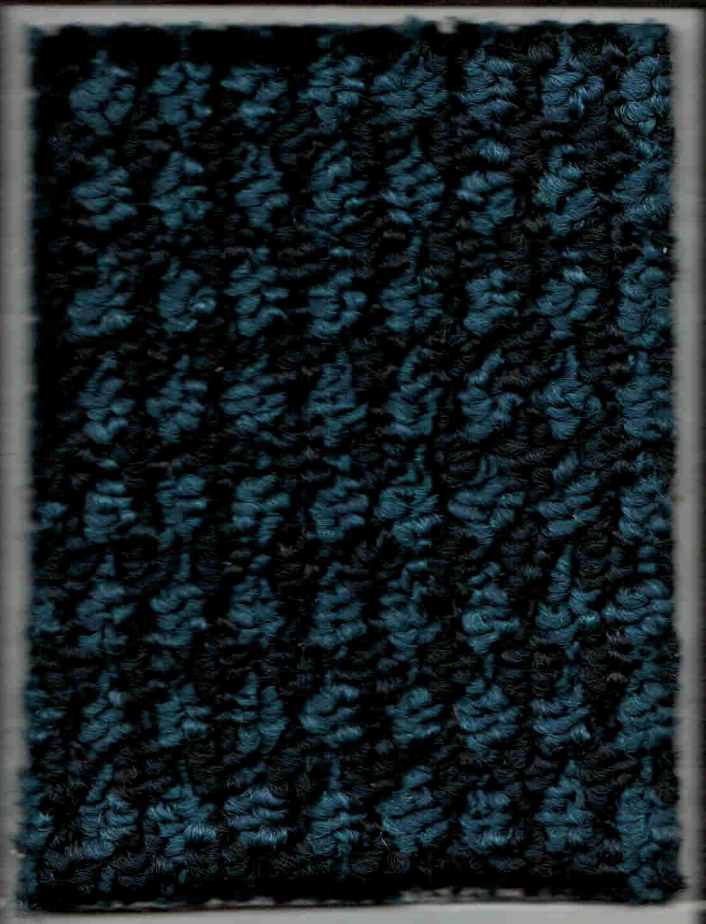

213 Blue Grey

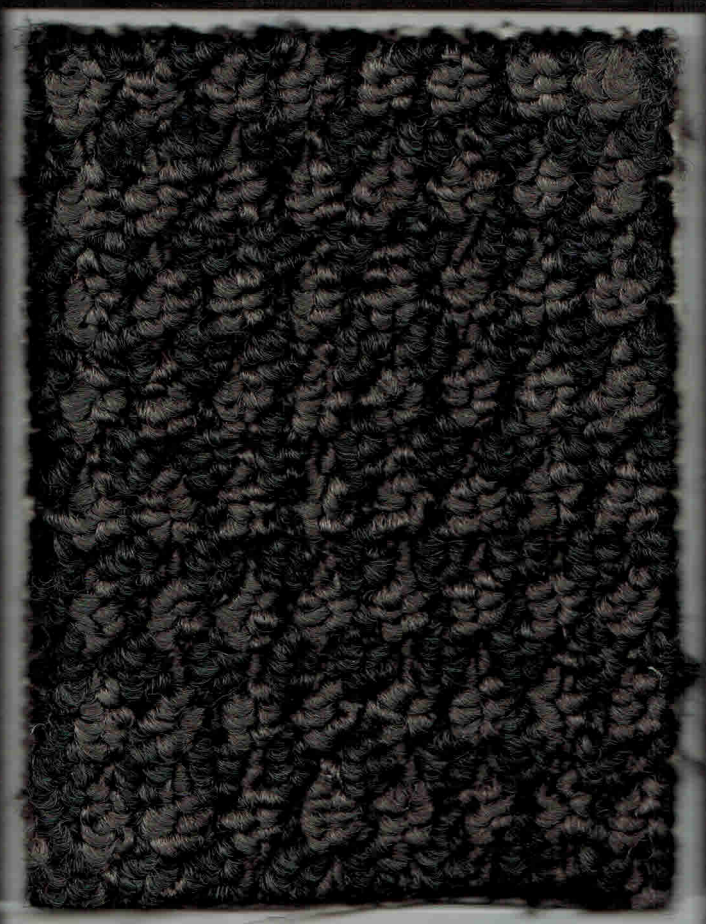

214 Dark Grey



503 Corn Husk

Specifications

Construction	1/10" Tufted Loop Pile Graphics
Fibre	100% BCF Solution 2400 Denier
Pile Weight	ca. 880g/m ² (26 oz/y ²)
Total Weight	ca. 1900g/m ² (56 oz/y ²)
Pile height	ca. 2mm low, ca. 6mm high
Stitch Rate	44.5 per 10cm (11.1 SPI)
Secondary Backing	ActionBac®
Standard Roll Size	3.66 x 30m

Warranties

10-year Limited Carpet Wear Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

Where seaming is necessary, a seam sealant **must** be used for all such installations.

Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (ATCC-175-2003)
Static Control	Built-in Permanent
Tuft Bind	6 lbs (ASTM-D-1335)
Dimensional Stability	Max 0.25% change (AACHEN)
Flammability	
Radiant Panel	0.25 W/cm ² (ASTM-E-648-06)
US Federal Flammability Std	Passes (CPSC FF1-70, 16CFR 1630, ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E-662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry cleaning	5 (AATCC-16S)
to ozone	5 (AATCC-129)



Elegance & Comfort in Modern Living